




LigoDLB MACH 5 ac

5 GHz high-capacity wireless device


Incredible performance

500+ Mbps throughput - a result of powerful hardware platform with 802.11ac technology based radio and a proprietary data transmission protocol (iPoll). Incorporating a 720 MHz powerful CPU, a iPoll3 / 11ac radio and 128Mbytes of RAM and 128Mbytes of flash memory, the LigoDLB ac series devices are an ideal solution for capacity demanding applications. State of the art RF design with great output power and sensitivity parameters improve range and capacity over highest the modulation - 256 QAM. The 48V Gigabit Ethernet port (802.3af) allows utilizing the full capacity of the radio when used in a point-to-point or point-to-multipoint network design. LigoDLB ac series devices are backwards compatible with LigoDLB devices using iPoll mode, which helps to expand or upgrade existing networks using the latest technologies over time.

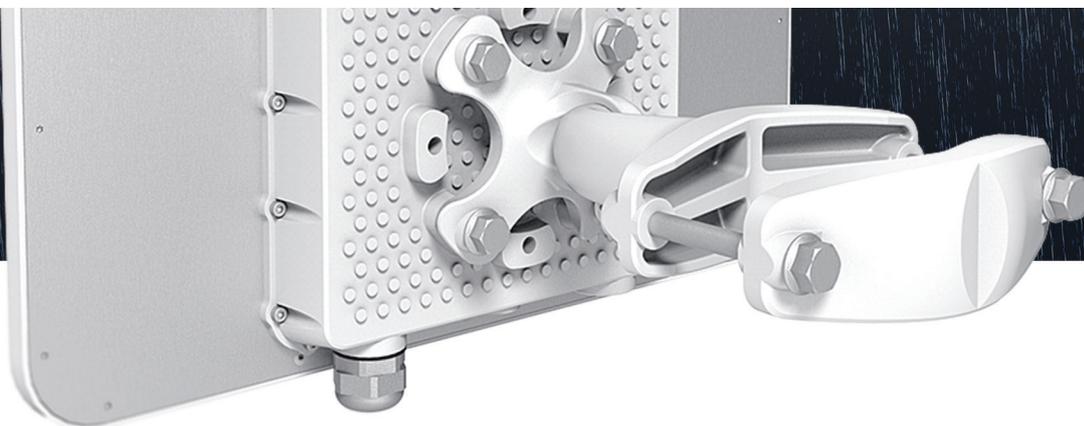

Built to perform

LigoDLB MACH 5 ac is designed to provide maximum performance in any conditions. Metal IP standards rated enclosure not only protects from harsh weather conditions, but also allows using high-power radio for long distance links at the same time creating a shield for unwanted RF noise from nearby sources. Directional 23 dBi panel antenna makes this product ideal for medium to long range communication both in point to point and point to multipoint scenario. Such outstanding quality and flexibility makes this product ideal option for wireless bridging especially in mission critical connectivity applications requiring reliable data transmission.

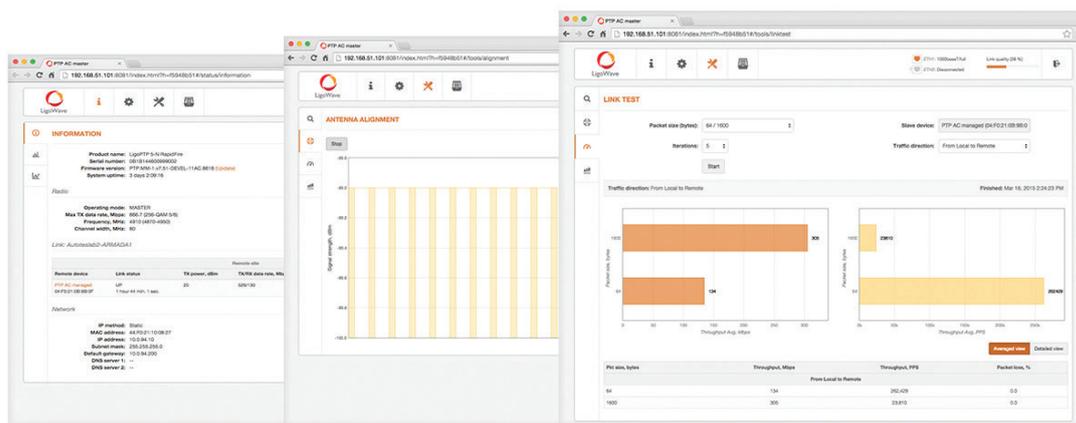

Powerfull OS

The LigoDLB OS is a highly functional and easy to use operating system embedded in all LigoDLB hardware devices for effortless setup and trouble free operation. High performance (500 Mbps) allows offering more bandwidth together with additional services such as VoIP and IPTV. This is possible when using LigoWave's smart QoS mechanism and multi-cast traffic enhancements for triple play services. Such services are essential for all next generation service providers to complement their existing portfolios. iPoll, LigoWave's proprietary transmission protocol, ensures smooth performance with a high number of clients even in noisy environments.

Specifications

| Product/ distance recommendation | PTMP mode | PTP mode | PTP mode (full capacity) |
|----------------------------------|----------------|-----------------|--------------------------|
| LigoDLB MACH 5ac | 12 km/ 7.45 mi | 20 km/ 12.43 mi | 5 km/ 3.15 mi |

Wireless

| | |
|----------------------|--|
| WLAN standard | IEEE 802.11 a/n/ac, iPoll 3 |
| Radio mode | MIMO 2x2 |
| Radio frequency band | 5.150 - 5.850 GHz (FCC 5.150 - 5.250 and 5.725 - 5.850 GHz) |
| Transmit power | Up to 30 dBm (country dependent) |
| Channel size | 5, 10, 20, 40, 80 MHz |
| Modulation schemes | 802.11 a/n: OFDM (64-QAM, 16-QAM, QPSK, BPSK) 802.11 ac: OFDM (256-QAM, 64-QAM, 16-QAM, QPSK, BPSK) |
| Data rates | 802.11 ac @ 40 Mhz: 400, 360, 300, 270, 240, 180, 120, 90, 60, 30 Mbps 802.11 ac @ 80 Mhz: 866, 780, 650, 585, 520, 390, 260, 195, 130, 65 Mbps |
| Error correction | FEC, LDPC |
| Management | Time division duplex |
| Duplexing scheme | Time division duplex |

| 40 MHz | Modulation, Mbps | 400 | 360 | 300 | 270 | 240 | 180 | 120 | 90 | 60 | 30 |
|--------|--------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | TX Power, dBm | 26 | 27 | 28 | 29 | 30 | 30 | 30 | 30 | 30 | 30 |
| | Receive sensitivity, dBm | -70 | -72 | -76 | -78 | -80 | -84 | -87 | -92 | -94 | -95 |
| 80 MHz | Modulation, Mbps | 866 | 780 | 650 | 585 | 520 | 390 | 260 | 195 | 130 | 65 |
| | TX Power, dBm | 24 | 25 | 25 | 26 | 27 | 28 | 28 | 29 | 29 | 29 |
| | Receive sensitivity, dBm | -64 | -66 | -70 | -72 | -74 | -78 | -81 | -85 | -88 | -90 |

Antenna

| | |
|------|---|
| Type | Integrated dual-polarized directional panel antenna |
| Gain | 23 dBi |

Wired

| | |
|------------------|------------------------------------|
| Interface | 10/100/1000 Base-T, RJ45 (802.3af) |
| Duplexing scheme | TDD |

Physical

| | |
|------------|--|
| Dimensions | Length 379 mm (14.9 "), width 387 mm (15.2 "), height 80 mm (3.15 ") |
| Weight | 3.3 kg (7.3 lb) |
| Mounting | Combination, heavy duty wall / pole mount bracket included |

Power

| | |
|-------------------------|---|
| Power supply | 37 - 56 VDC PoE 802.3af (AC to DC adapter included) |
| Power source | 100 – 240 VAC |
| Power consumption (max) | 10 W |

Environmental

| | |
|-----------------------|--------------------------------|
| Operating temperature | -40°C (-40 F) ~ +65°C (+149 F) |
| Humidity | 0 ~ 90 % (non-condensing) |


Management

| | |
|-------------------|-------------------------------|
| System monitoring | SNMP v3, Syslog, Web UI, WNMS |
| Configuration | WebUi, WNSM |

Regulatory

| | |
|---------------|-----------|
| Certification | FCC/IC/CE |
|---------------|-----------|

Antenna specifications

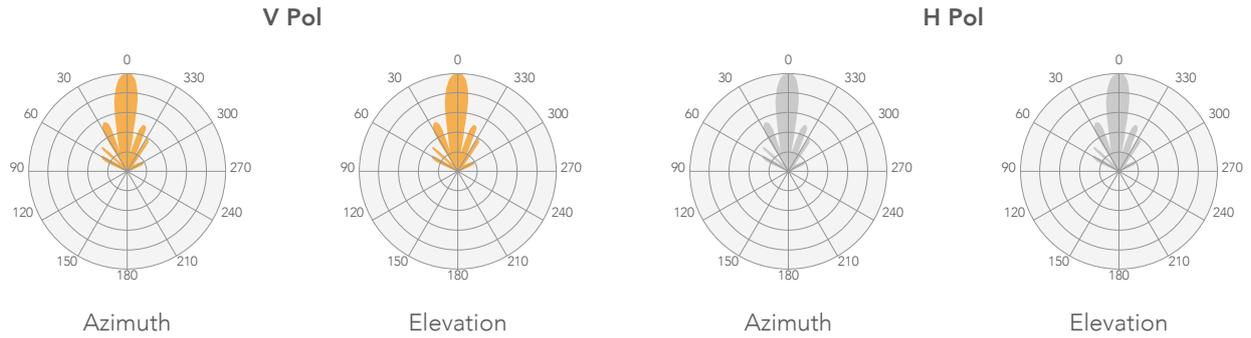

| | |
|---------------------------|---------------|
| Frequency range | 5.1 - 5.9 GHz |
| Gain | 23 dBi |
| Polarization | Dual linear |
| Cross-pol Isolation | 27 dBi |
| VSWR | 1.5:1 |
| Azimuth beamwidth (H pol) | 6 deg |
| Azimuth beamwidth (V pol) | 7 deg |
| Elevation beamwidth | 9 deg |